


LEGEND		
HARD LANDSCAPE		
DWG	NBS	Description
EXISTING, TO BE RETAINED		
BE2	n.a.	Existing brick wall to be retained
BE5	n.a.	Existing metal railing to be retained
DE1	n.a.	Existing gully drain
EE3	n.a.	Existing natural stone upstand edge to be retained
EE5	n.a.	Existing concrete kerb, upstand, to be retained
SE1	n.a.	Existing Yorkstone slab paving to be retained
SE4	n.a.	Existing concrete slab paving to be retained
SE5	n.a.	Existing concrete surfacing to be retained
SE13	n.a.	Existing brick paving to be retained
TE1	n.a.	Existing brick and natural stone steps to be retained
EXISTING, TO BE RETAINED AND REFURBISHED (R&R)		
BE2a		Existing brick wall to be demolished to 450mm seating height and made good
BE5a		Existing metal railing to be R&R
FE6		Existing garden storage to be R&R
FE7		Existing leaf bins to be R&R
GE1		Existing gate to be R&R
LE1		Existing historic 'Biggleson' light column to be R&R
PROPOSED		
B4		Metal railing to match existing
E5		Metal edge 6mm, upstand
E5a		Metal edge 6mm, flush, staked
F1a		Timber and cast iron bench with backrest and armrests, 2.1m length
F1b		Timber and cast iron bench with backrest and armrests, 2.8m length
F6		Litter bin
F18		Timber river planter
S1		Reclaimed Yorkstone slab paving to match existing, Cellweb build-up
S1a		Reclaimed Yorkstone slab paving to match existing, on concrete
S2		Resin-Bonded gravel
S4		Self-Binding gravel - To tree pits
T1		Brick and natural stone step to match existing
T5		Metal handrail to match existing
IS		Interpretation signage, Install only

LEGEND	
	Site boundary
	Scheduled Monument boundary
	Existing tree and Root Protection Area (RPA)
	Proposed tree
SOFT LANDSCAPE	
	Existing ornamental planting retained and enhanced
	Perennial flower meadows and bulb planting
	Amenity lawn
	Native marginal planting

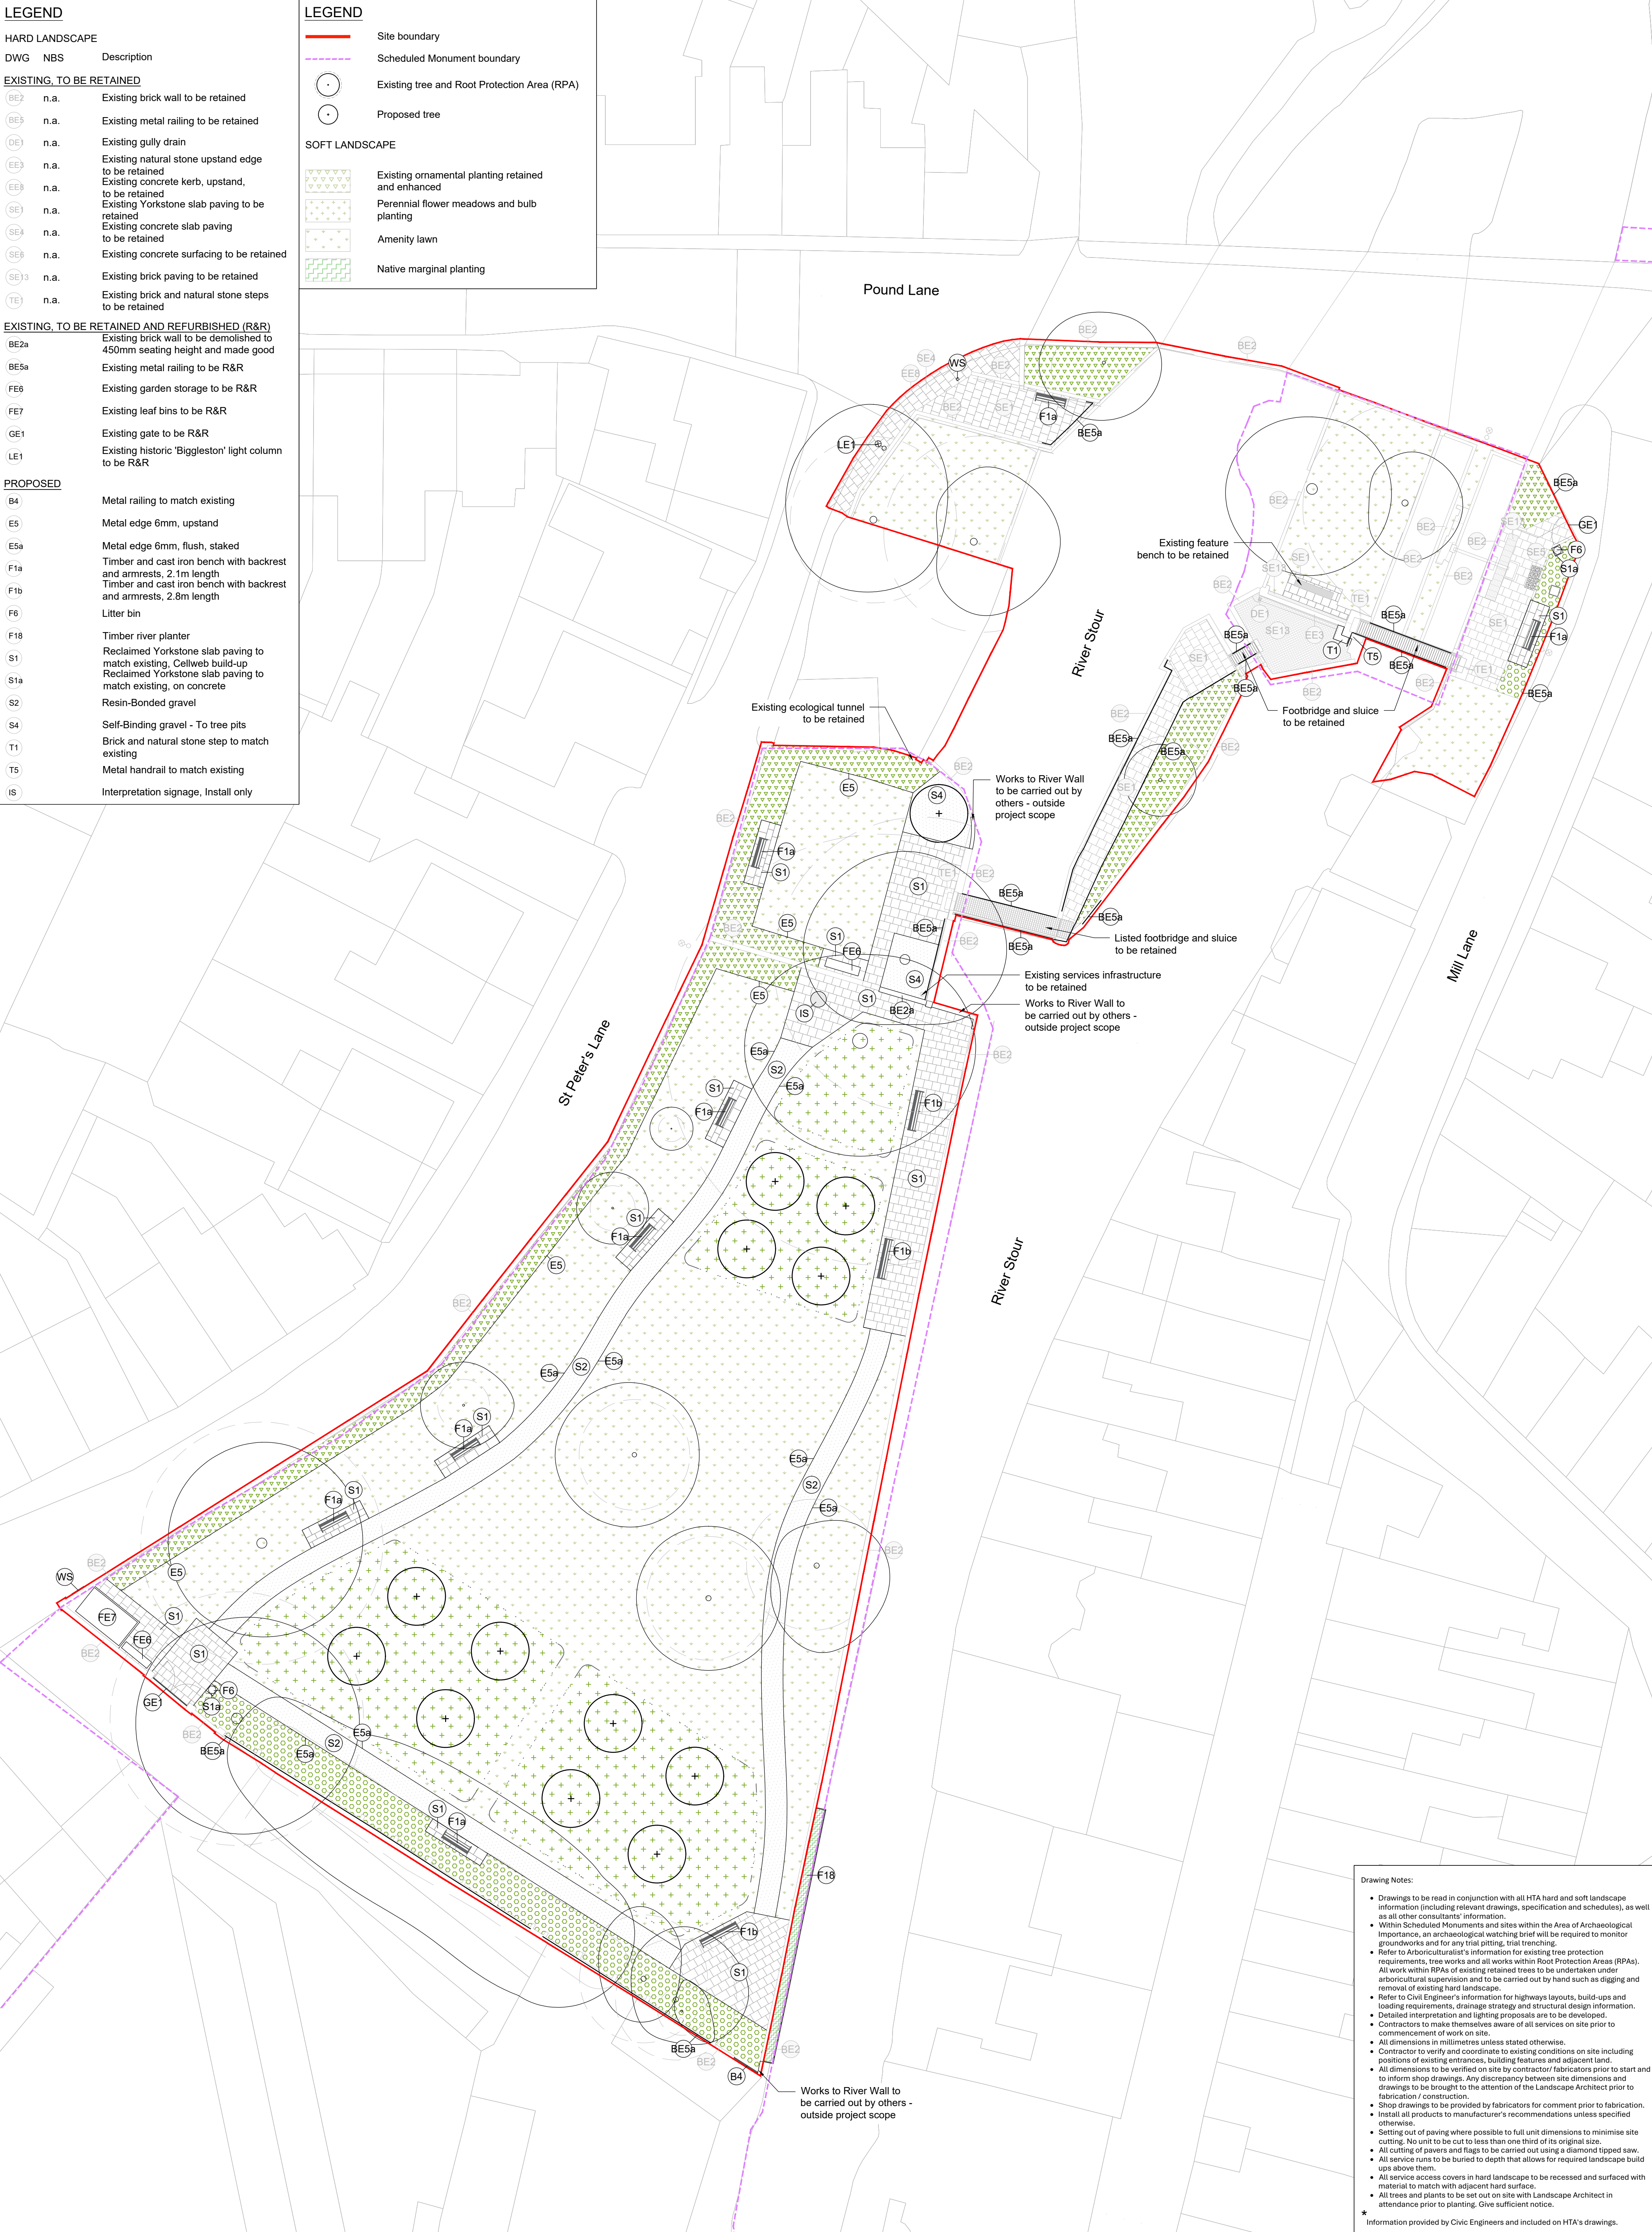

Drawing Notes:	
• Drawings to be read in conjunction with all HTA hard and soft landscape information (including relevant drawings, specification and schedules), as well as all other consultants' information.	
• Within Scheduled Monuments and sites within the Area of Archaeological Importance, an archaeological watching brief will be required to monitor groundworks and for any trial pitting, trial trenching.	
• Refer to Arboriculturalist's information for existing tree protection requirements, tree works and all works within Root Protection Areas (RPAs). All work within RPAs of existing retained trees to be undertaken under arboricultural supervision and to be carried out by hand such as digging and removal of existing hard landscape.	
• Refer to Civil Engineer's information for highways layouts, build-ups and loading requirements, drainage strategy and structural design information.	
• Detailed interpretation and lighting proposals are to be developed.	
• Contractors to make themselves aware of all services on site prior to commencement of work on site.	
• All dimensions in millimetres unless stated otherwise.	
• Contractor to verify and coordinate to existing conditions on site including positions of existing entrances, building features and adjacent land.	
• All dimensions to be verified on site by contractor/ fabricators prior to start and to inform shop drawings. Any discrepancy between site dimensions and drawings to be brought to the attention of the Landscape Architect prior to fabrication / construction.	
• Shop drawings to be provided by fabricators for comment prior to fabrication.	
• Install all products to manufacturer's recommendations unless specified otherwise.	
• Setting out of paving where possible to full unit dimensions to minimise site cutting. No unit to be cut to less than one third of its original size.	
• All cutting of pavers and flags to be carried out using a diamond tipped saw.	
• All service runs to be buried to depth that allows for required landscape build ups above them.	
• All service access covers in hard landscape to be recessed and surfaced with material to match with adjacent hard surface.	
• All trees and plants to be set out on site with Landscape Architect in attendance prior to planting. Give sufficient notice.	
* Information provided by Civil Engineers and included on HTA's drawings.	